


ICIS

TITE
WAD

DURA-BILT® BALERS

Turn Waste
Into Profits

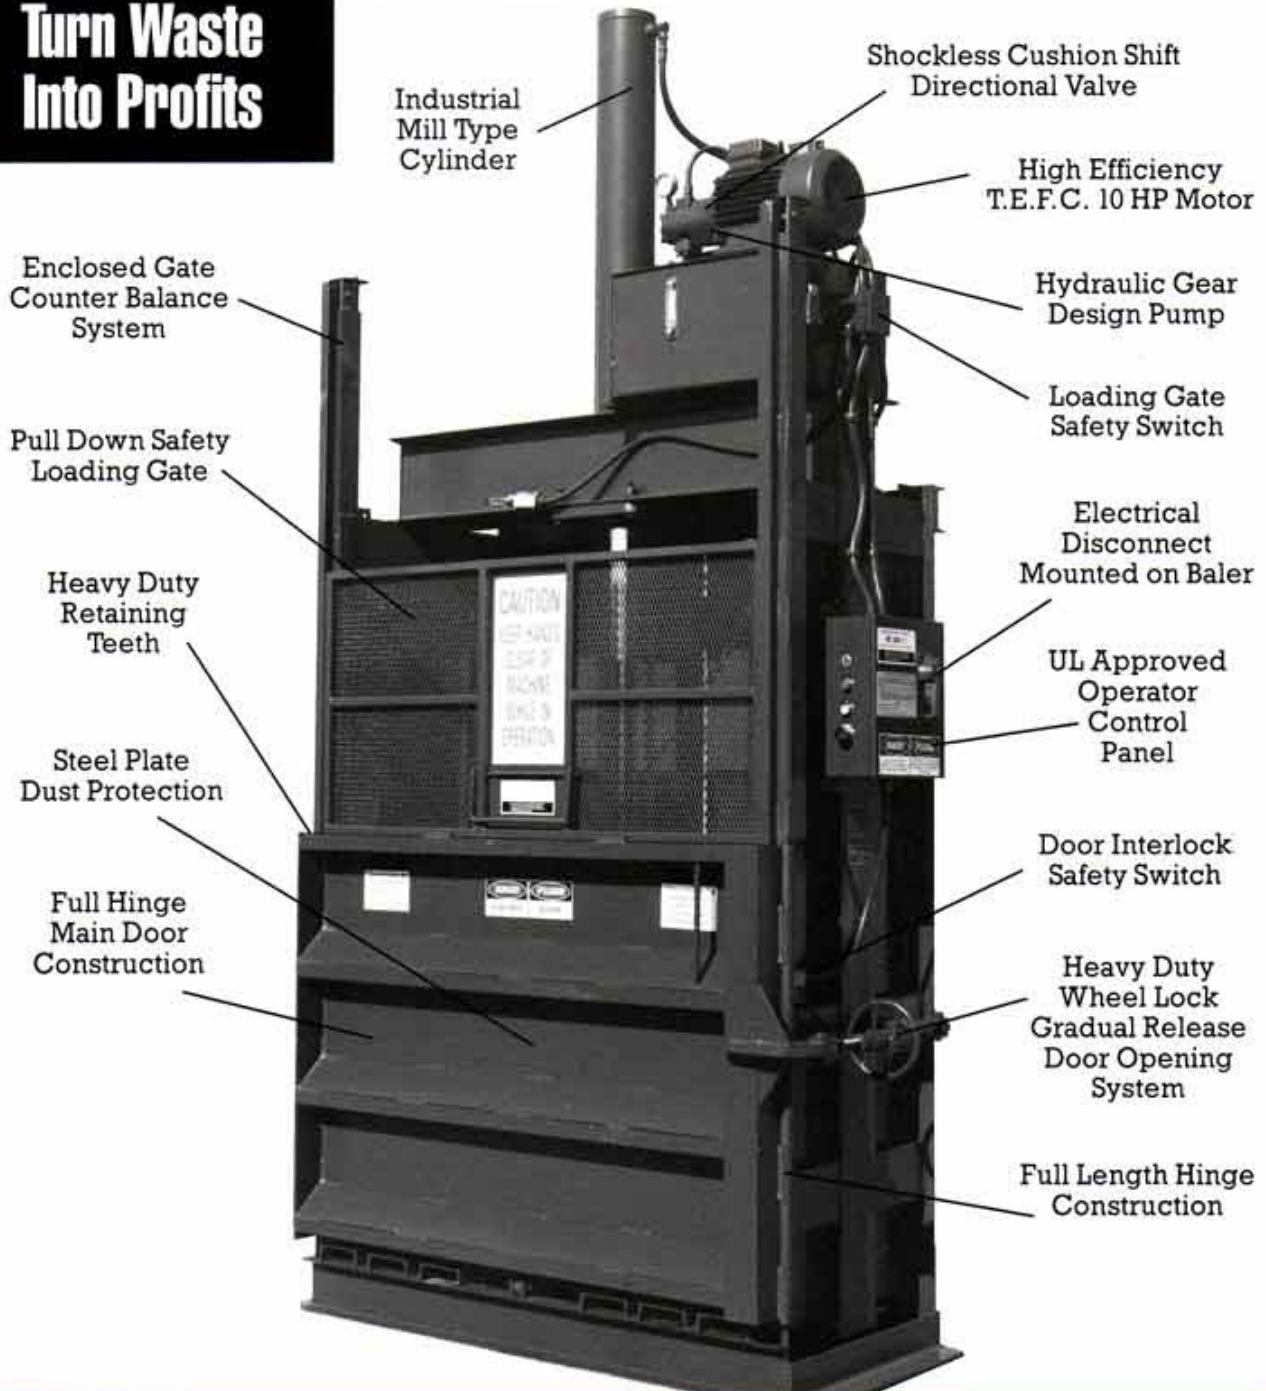

**TITE
WAD**

VERTICAL BALERS

SPECIFICATIONS	V6030HD	V6030LPHD	V7230HD	V7230XHD
Bale Size in Baler	60 x 30 x 44"	60 x 30 x 38	72 x 30 x 44"	72 x 30 x 44"
Overall Dimensions	76 x 38 x 132"	76 x 38 x 120"	102 x 38 x 138"	102 x 38 x 132"
Feed Opening	60 x 28"	60 x 22"	72 x 24"	72 x 24"
Bale Weight	700-1050 lbs.	600-800 lbs.	900-1200 lbs.	1200-1400 lbs.
Pump	12 GPM gear	12 GPM gear	12 GPM gear	15 GPM gear
Cylinder	6"dia.-48" stroke	6"dia.-33" stroke	6"dia.-48" stroke	7"dia.-42" stroke
Motor Horse Power	10 HP*	10 HP*	10 HP*	20 HP
System Pressure	2000 PSI	2000 PSI	2000 PSI	2800 PSI
Platen Pressure	56,520 lbs.	56,250 lbs.	56,250 lbs.	107,745 lbs.
Cycle Time	45 seconds	39 seconds	45 seconds	55 seconds
Control Power	115 Volt	115 Volt	115 Volt	115 Volt
Weight	5100 lbs.	5050 lbs.	5275 lbs.	5950 lbs.
Electrical Controls	NEMA 12 - Dust Tight Design - UL Approved Components			

Nationwide installations custom-fitted to any user requirements

* 15 HP Available

Design and specifications subject to change without notice.

Customer Service

A company commitment—not just words! A commitment supported by:

- The Southwest's largest waste equipment parts inventory
- Full-service departments at all locations
- Factory trained service technicians
- On call service or "Planned Maintenance Contracts"
- Over 25 years of satisfactory customer service history

Financial Support

IDS offers varied plans for purchase to fit the needs of qualified accounts:

- Outright purchase with limited terms
- Lease/purchase with option to buy with flexible time periods of 36-48-60 months

IDS

INDUSTRIAL DISPOSAL SUPPLY COMPANY

Features


- Automatic bale size system
- Soft-shift shockless hydraulic circuit
- Safety interlock circuit on bale door and safety feed gate
- Semi-automatic bale ejection system, automatic ejector release
- Factory wired for easy installation
- Heavy-duty retaining teeth
- Manual pull down safety gate

Safety Features

- Motor overload protectors standard on all units
- Safety loading gate must be closed to operate. If raised during cycle, baler will reverse and shut down in UP position
- Balers equipped with electrical safety interlocks to prevent cycling with doors open



Bilingual safety decals are provided to meet current A.N.S.I. standards.

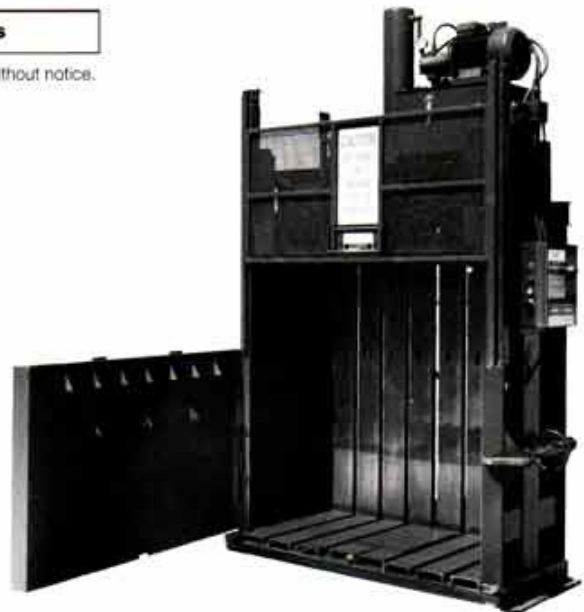**San Antonio**

P.O. Box 8175
78208

210/227-3441

Fax 210/227-4424

Houston

P.O. Box 8623
77249

713/692-7289

Fax 713/692-7996

Plano (Dallas)

P.O. Box 860707
75086

214/423-1423

Fax 214/424-7203